


SPRO B6[®]




DHDVR06-B6-V3

8 (4 + 4) Channel 4K DVR 5 in 1 (CVI / TVI / AHD / ANALOGUE / IP)
With AI Technology

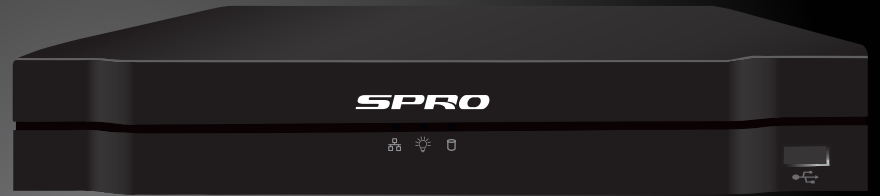

Key Features:

- H.265+ video compression
- 4K recording@7fps, 4MP@15fps, 1080P@25fps
- Supports up to 8MP on extra IP channels
- Supports "IP Audio over CAT5e" on extra IP channels (compatible cameras required)
- P2P(no port forwarding required)
- SMD PLUS (smart motion detection plus)
- Perimeter protection
- Intrusion & tripwire (human & vehicle classification)
- Face detection 2.0
- 2 way audio
- Push notification
- Spot monitoring via local network

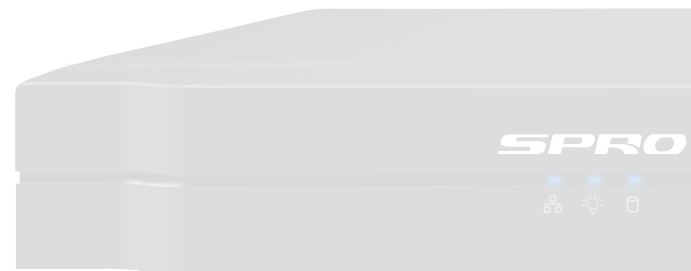

SPECIFICATIONS

Model Number	DHDVR06-B6-V3
Main Processor	Industrial-grade processor
Operating System	Embedded Linux
Operating Interface	Web; Local GUI

(continued)

Perimeter Protection

Performance	Advanced Model : 2 channels, 10 IVS for each channel General Model : 4 channels, 10 IVS for each channel
--------------------	---

Face Detection

Face Attributes	Gender; age group; glasses; expressions; face mask; beard
------------------------	---

Face Detection Performance by recorder	2 channel (up to 8 face images/s each channel)
---	--

Face Recognition

Face Database Capacity	Up to 10 face databases and 20, 000 images in total
-------------------------------	---

Face Recognition Performance of AI by Recorder	2 channel
---	-----------

SMD Plus by Recorder

SMD Plus by Recorder	4 channels: Secondary filtering for human and motor vehicle, reducing false alarms caused by leaves, rain and lighting condition change
-----------------------------	---

Audio and Video

Analogue Camera Input	4 BNC ports, CVI access by default, supports HDCVI/ AHD /TVI/CVBS auto-detect
------------------------------	---

Camera Input	1. CVI: 4K@25/30 fps; 6 MP@20 fps; 5 MP@20 fps; 5 MP@25 fps; 4 MP@25/30 fps; 1080p@25/30 fps; 720p@25/30 fps; 720p@50/60 fps. 2. TVI: 4K@15 fps; 5 MP@20 fps; 4 MP@25/30 fps; 3 MP@25/30 fps; 1080p@25/30 fps; 720p@25/30 fps. 3. AHD: 4K@15 fps; 5 MP@20 fps; 4 MP@25/30 fps; 3 MP@25/30 fps; 1080p@25/30 fps; 720p@25/30 fps
---------------------	---

IP Camera Input	Up to 8 channels of IPC access 4 IP channels by default + 4 channels (analogue channels are converted to IP channels) incoming bandwidth: 64 Mbps, recording bandwidth: 64 Mbps and outgoing bandwidth: 64 Mbps *After IP channels are added beyond the existing channels, the AI Function (IVS, SMD, FACE) will be disabled
------------------------	---

(continued)

Encoding Capacity	Main stream: 4K@(1 fps-7 fps); 6 MP@(1 fps-10 fps); 5 MP@(1 fps-12 fps); 4K-N, 4 MP, 3 MP@(1 fps-15 fps); 4M-N, 1080p, 720p, 960H, D1, CIF@(1 fps-25/30 fps); Sub stream: 960H@(1 fps-15 fps); D1/CIF@(1 fps-25/30 fps)
Dual-stream	Yes
Video Bit Rate	32 kbps-6144kbps
Audio Sampling	8kHz, 16 bit
Audio Bit Rate	64 kbps
Video Output	1 HDMI, 1 VGA HDMI: 3840 × 2160, 1920 × 1080, 1280 × 1024, 1280 × 720 VGA: 1920 × 1080, 1280 × 1024, 1280 × 720
Multi-screen Display	When IP extension mode not enabled: 1/4 When IP extension mode enabled: 1/4/8/9
Third-party Camera Access	ONVIF; Panasonic; Sony; Axis; Arecont; Pelco; Canon; Samsung
Compression Standard	
Video Compression	AI Coding; Smart H.265+; H.265; Smart H.264+; H.264
Audio Compression	G.711a; G.711u; PCM
Network	
Network Protocol	HTTP; HTTPS; TCP/IP; IPv4; IPv6; RTSP; UDP; NTP; DHCP; DNS; SMTP; UPnP; IP Filter; DDNS; Alarm Server; P2P; Auto Registration
Mobile Phone Access	iOS; Android
Interoperability	ONVIF 22.12(Profile T; Profile S; Profile G); CGI; SDK
Browser	Chrome IE9 or later Firefox
Network Mode	Single-address mode
Recording Playback	
Record Mode	General, motion detection; intelligent; alarm; POS
Recording Playback	1/4
Backup Method	USB device and network
Playback Mode	Instant playback, general playback, event playback, tag playback, smart playback (face and motion detection)

(continued)

Alarm

General Alarm	Motion detection, video loss, tampering
Anomaly Alarm	No disk; disk error; disk full; offline; IP conflict; MAC conflict
Intelligent Alarm	Face detection, face recognition, perimeter protection
Alarm Linkage	Record, snapshot (panoramic), IPC external alarm output, access controller, voice prompt, buzzer, log, preset, email


Ports

Audio Input	1-channel RCA 4-channel BNC (Coaxial Audio)
Audio Output	1-channel RCA
Two-way Talk	Yes (share the same audio input with the first channel)
HDD Interface	1 SATA port, up to 16TB. The Maximum HDD capacity varies with environment temperature.
RS-485	1 port, for PTZ control
USB	2 (1 front USB 2.0 port, 1 rear USB 2.0 port)
HDMI	1
VGA	1
Network Port	1 (10/100Mbps Ethernet port, RJ-45)


General

Power Supply	12 VDC, 2 A
Power Consumption	<7 W (without HDD)
Net Weight	0.96 kg (2.12 lb)
Gross Weight	1.37 kg (3.03 lb)
Product Dimensions	260.0 mm × 237.9 mm × 47.6 mm (10.24" × 9.37" × 1.87") (W × D × H)
Operating Temperature	-10 °C to +55 °C (+14 °F to +131 °F)
Storage Temperature	-20 °C to +60 °C (-4 °F to +140 °F)
Operating Humidity	≤93% (RH))
Installation	Desktop
Certifications	CE: CE-LVD: IEC 62368-1 CE-EMC: EN 61000-3-2, EN 61000-3-3, EN 55032, EN 50130, EN 55024, EN 55035 FCC: Part 15 Subpart B

Panel

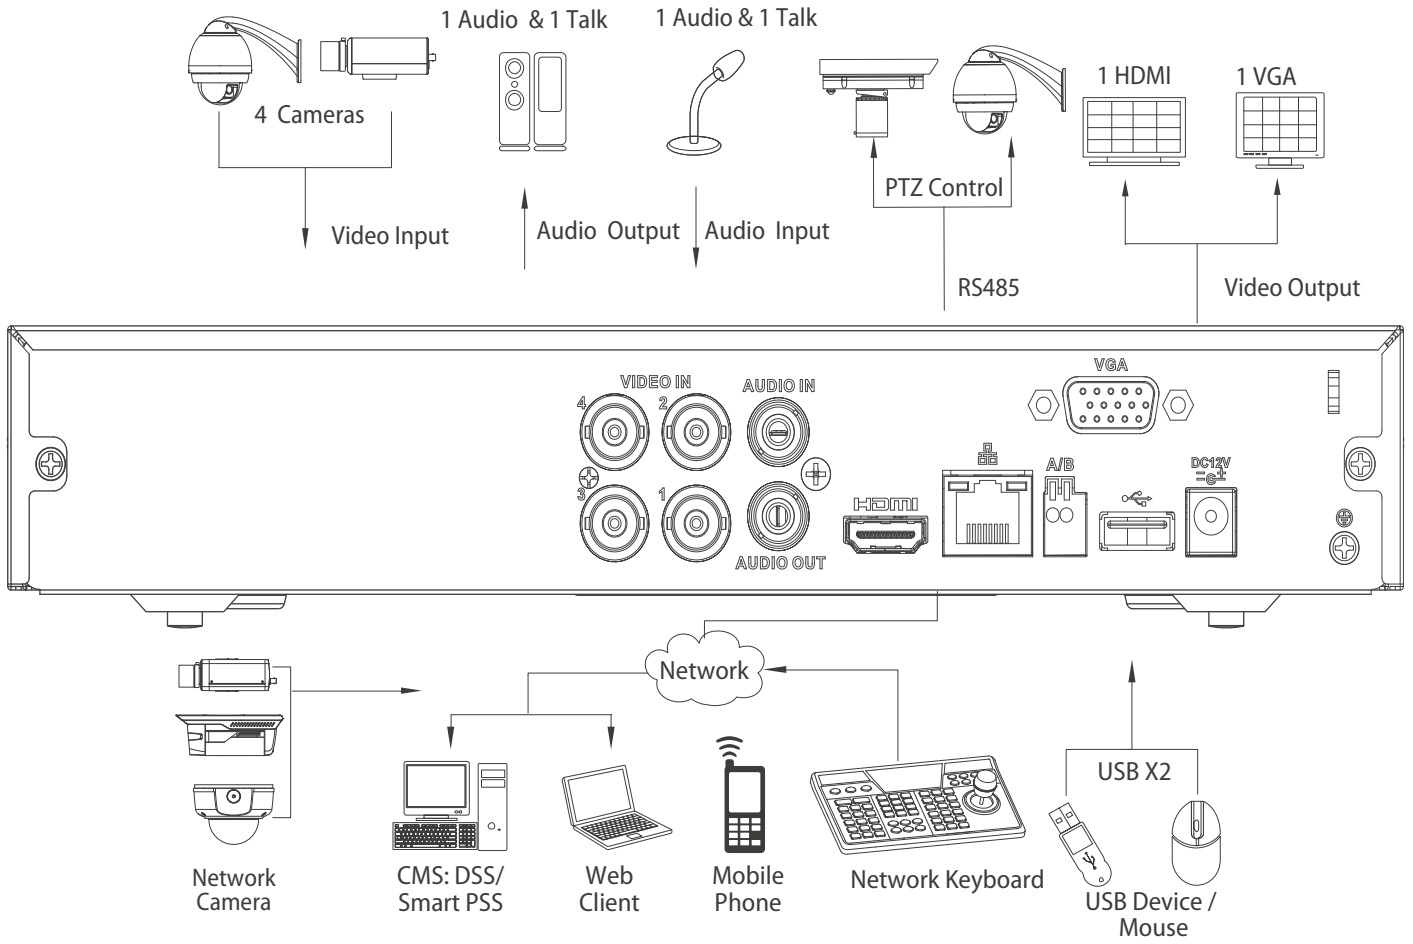

Dimensions (mm[inch])

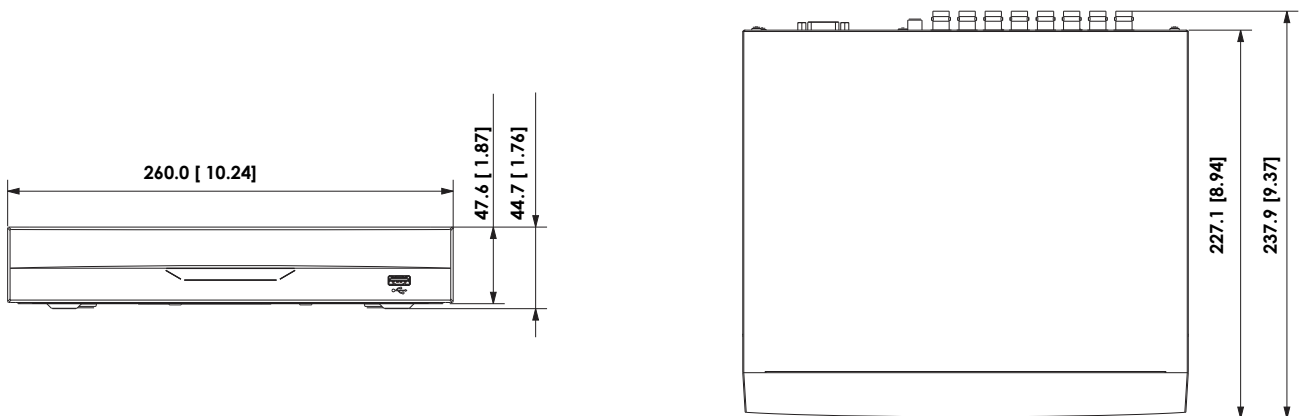

All specifications are subject to change without notice. Copyright © Luxrite Ltd. All rights reserved